

平成30年度 伊豆スカイライン 舗装修繕工事（その1）

数量総括表

工種	規格	単位	数量		摘要
			箇所	計	
舗装修繕工 施工延長		m	1,000	1,000	
路面切削工					
路面切削工	t = 50mm	m ²	8,239	8,239	
切削殻処理		m ³	412	412	
クラック防止工					
クラック防止シート	W=100cm	m	500	500	
オーバーレイ工					
表層工（タックコート）	t=50mm	m ²	8,239	8,239	
道路附属施設修繕工					
区画線・実線・白	W=20m	m	2,000	2,000	
区画線・実線・黄	W=20m	m	500	500	
区画線・破線・白	W=15m	m	250	250	
区画線・文字記号・白	15 c m 換算	m	4,322	4,322	
区画線・文字記号・黄	15 c m 換算	m	57	57	
すべり止め舗装	RPN-303	m ²	464	464	

H30 伊豆スカイライン 舗装修繕工事（その1）

箇所		延長	面積	備考
箇所1-1	7.0-7.2	L=200m	1,850.00	
箇所1-2	7.4-7.6	L=200m	1,488.00	
箇所2	8.2-8.5	L=300m	2,374.50	
箇所3	8.9-9.1	L=200m	1,760.00	
箇所4	9.7-9.8	L=100m	766.00	
計		L=1,000m	8,238.50	

箇所1

	測点	距離	幅員	平均	面積	備考
↓7.0km	0	0	8.75	8.20	0.00	
	1	20	8.75	8.75	175.00	
	2	20	7.00	7.88	157.50	
	3	20	7.00	7.58	151.67	
その1 箇所1-1	4	20	8.75	7.88	157.50	
	5	20	8.75	8.75	175.00	
	6	20	8.75	8.75	175.00	
	7	20	8.75	8.75	175.00	
	8	20	8.75	8.75	175.00	
	9	20	7.00	7.88	157.50	
7.2km	10	20	7.00	7.00	140.00	
	計	200			1,850	
7.4km	0	0	7.00	7.00	0.00	
	1	20	7.00	7.00	140.00	
	2	20	7.00	7.00	140.00	
	3	20	8.10	7.55	151.00	
その1 箇所1-2	4	20	8.10	8.10	162.00	
	5	20	8.10	8.10	162.00	
	6	20	8.10	8.10	162.00	
	7	20	7.00	7.55	151.00	
	8	20	7.00	7.00	140.00	
	9	20	7.00	7.00	140.00	
7.6km	10	20	7.00	7.00	140.00	
	計	200			1488.00	
	合計	400.00			3,338.31	

箇所2

	測点	距離	幅員	平均	面積	備考
8.2km	0	0	8.75		0.00	
	1	20	8.75	8.75	175.00	
	2	20	8.75	8.75	175.00	
	3	20	7.00	7.88	157.50	
	4	20	7.00	7.00	140.00	
	5	20	7.00	7.00	140.00	
	6	20	7.00	7.00	140.00	
その1	7	20	8.10	7.55	151.00	
箇所2	8	20	8.10	8.10	162.00	
	9	20	8.10	8.10	162.00	
	10	20	8.10	8.10	162.00	
	11	20	8.10	8.10	162.00	
	12	20	8.10	8.10	162.00	
	13	20	8.10	8.10	162.00	
	14	20	8.10	8.10	162.00	
8.5km	15	20	8.10	8.10	162.00	
	300.00				2,374.50	

箇所3

測点	距離	幅員	平均	面積	備考
0	0	8.8	8.80	0.00	
1	20	8.8	8.80	176.00	
2	20	8.8	8.80	176.00	
3	20	8.8	8.80	176.00	
4	20	8.8	8.80	176.00	
5	20	8.8	8.80	176.00	
6	20	8.8	8.80	176.00	
7	20	8.8	8.80	176.00	
8	20	8.8	8.80	176.00	
9	20	8.8	8.80	176.00	
10	20	8.8	8.80	176.00	
200.00				1,760.00	

8.9km

その1
箇所3

9.1km

箇所4

	測点	距離	幅員	平均	面積	備考
9.7km	0	0	8.10	0.00	0.00	
	1	20	8.10	8.10	162.00	
その1 箇所4	2	20	7.00	7.55	151.00	
	3	20	7.00	7.00	140.00	
	4	20	8.10	7.55	151.00	
	5	20	8.10	8.10	162.00	
9.8km						
	100.00				766.00	

道路附属施設修繕工

区画線 実線 白 W=20cm ①									
測点			測点			延長	摘要		
箇所1-1									
NO	0	+		NO	10	+		400	
箇所1-2									
NO	0	+		NO	10	+		400	
計								800	
箇所 2									
NO	0	+		NO	15	+		600	
計								600	
箇所 3									
NO	0	+		NO	10	+		400	
計								400	
箇所 4									
NO	0	+		NO	5	+		200	
計								200	
合計							2,000		

区画線 実線 黄 W=20cm ②									
測点			測点			距離	摘要		
箇所1-1									
NO	0	+		NO	10	+		200	
計								200	
箇所2									
NO	0			NO	15			300	
計								300	
箇所3									
NO				NO				0	
NO				NO				0	
計								0	
箇所4									
NO				NO				0	
NO				NO				0	
計								0	
合計							500		
合計 ①+②							2,500		

区画線 破線 白 W=15cm									
測点			測点			距離	摘要		
箇所 1-2									
NO	0	+		NO	10	+		100	
計								100	
箇所3									
NO	0	+		NO	10	+		100	
計								100	
箇所 4									
NO	0	+		NO	5	+		50	
計								50	
合計							250		


区画線 文字・記号 W=15cm換算									
測点			測点			距離		摘要	
箇所 1-1									
NO	0	+		NO	10	+		1,067	ドットライン
NO	0	+		NO	10	+		1,067	ドットライン
計								2,134	
箇所 1-2									
NO	5	+		NO	10	+		533	ドットライン
計								533	
箇所 2									
NO	0	+		NO	10	+		19.8	40
NO	0	+		NO	5	+		533	ドットライン
NO									
計								553	
箇所 3									
NO	0			NO	10			1,067	ドットライン
NO	0			NO	10			37.14	50×2箇所
NO	0			NO	10			25	矢印×4箇所
NO								30	本線
NO									
計								1,159	
箇所 4									
NO									
計								0	
合計								4,378.94	

記号文字 白	4,322.00
記号文字 黄	56.94
計	4,378.94

道路附属施設修繕工

すべり止め舗装										
測点			測点				延長	摘要		
箇所 1-1										
NO	0	+		NO	10	+	135.00	下り	30箇所	
NO		+		NO		+	0.00			
NO		+		NO		+	0			
NO		+		NO		+	0			
NO		+		NO		+	0			
計							135			
箇所1-2										
NO	0	+		NO	10	+	81.00	上り	18箇所	
NO	0	+		NO	10	+	76.50	下り	17箇所	
NO		+		NO		+	0			
NO		+		NO		+	0			
NO		+		NO		+	0			
計							157.5			
箇所2										
NO	0	+		NO	10	+	36.00	下り	8箇所	
NO		+		NO		+	0			
NO		+		NO		+	0			
NO		+		NO		+	0			
NO		+		NO		+	0			
計							36			
箇所3										
NO	0	+		NO	10	+	135.00	下り	30箇所	
NO		+		NO		+	0.00			
NO		+		NO		+	0			
NO		+		NO		+	0			
NO		+		NO		+	0			
計							135			
合計							463.5			

RPN-303

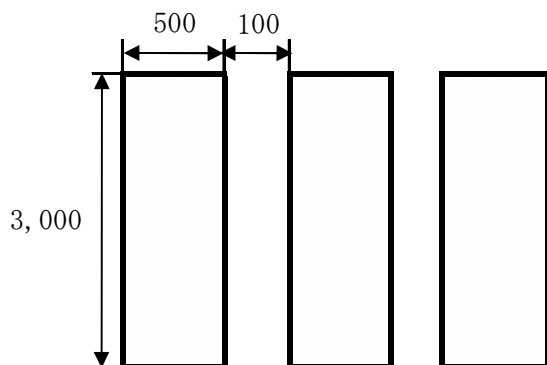

$$0.5 \times 3 \times 3 = 4.50\text{m}^2 \quad (\text{1箇所当り})$$